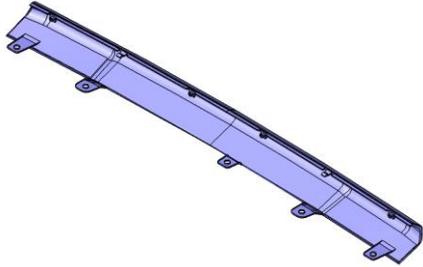







KIT CONTENTS:


1x Front Bumper Under Guard


OPTIONAL ITEMS:
Reuse existing parts

 4x Screw
904500031S

 3x Clip
909140063

 18x Clip
909140007

TOOLS REQUIRED:



Screwdriver




Plastic Trim Tool



10mm

MEANING OF CHARACTERS:



:Remove



:Install



:Disconnect




:Connect


 :Location of Clip
or Screw

T

:Tightening Torque



:Loosen




:Discard



:Reuse



1

Disconnect the ground cable from battery.

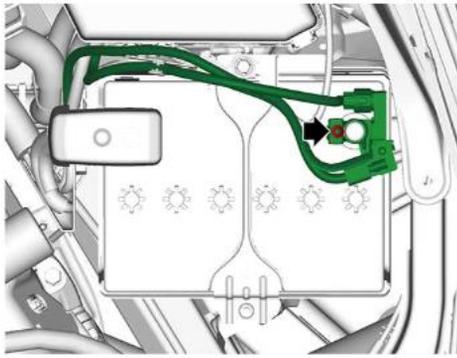


2

Remove Front Bumper

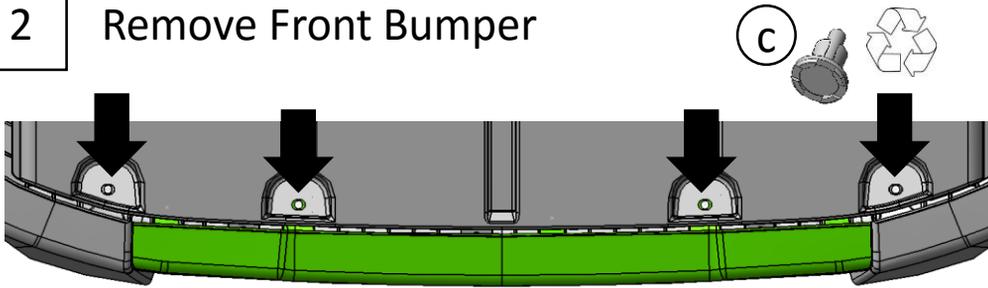


2a

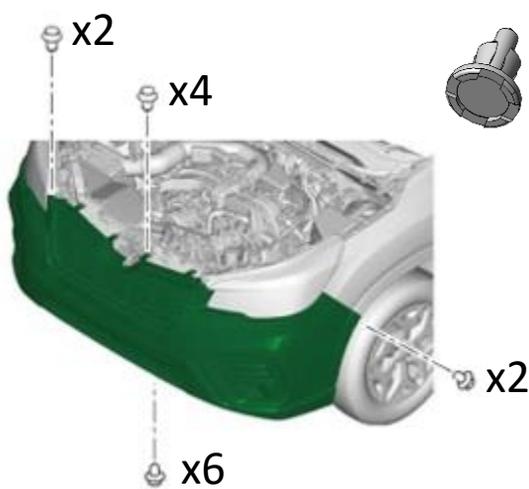

2b

While pushing up the lower side (a) of the bumper face front, release the engagement in the order from (b) to (f).

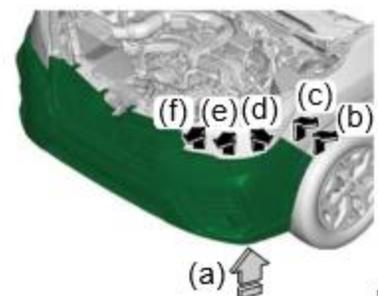

EI-1

2c

Disconnect the fog light connect (if applicable). Both sides




2d



Remove the bumper face front while pulling up the center part of the bumper




3

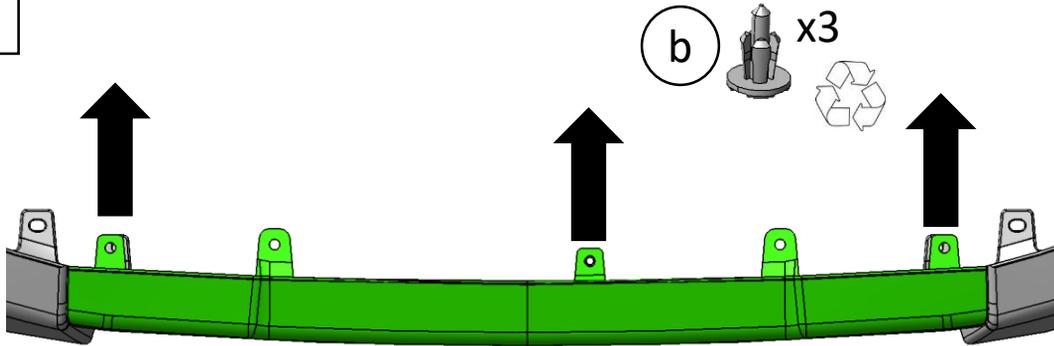


4

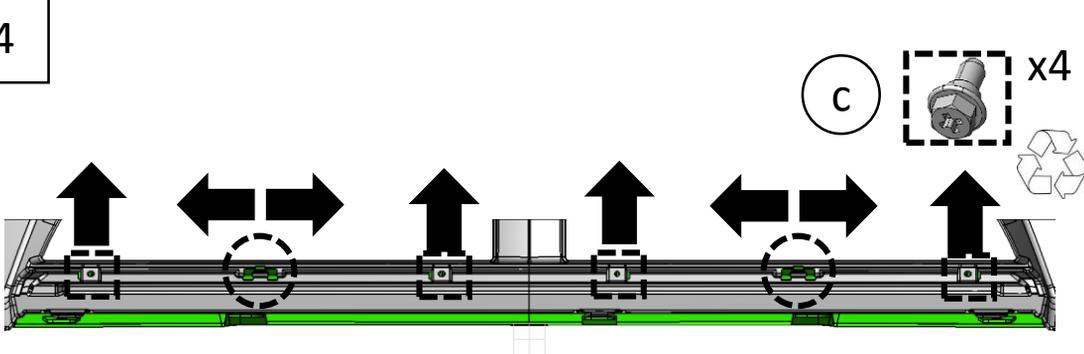


5

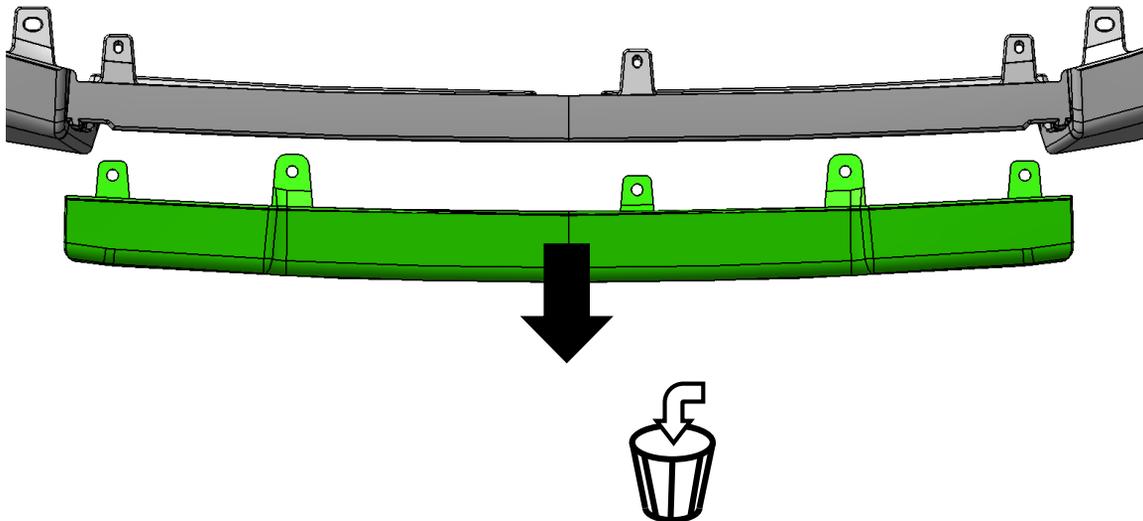

6

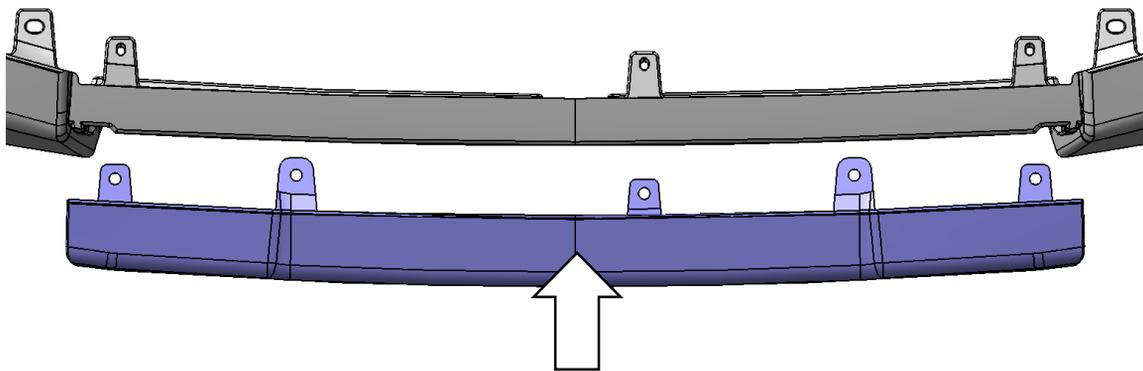


7

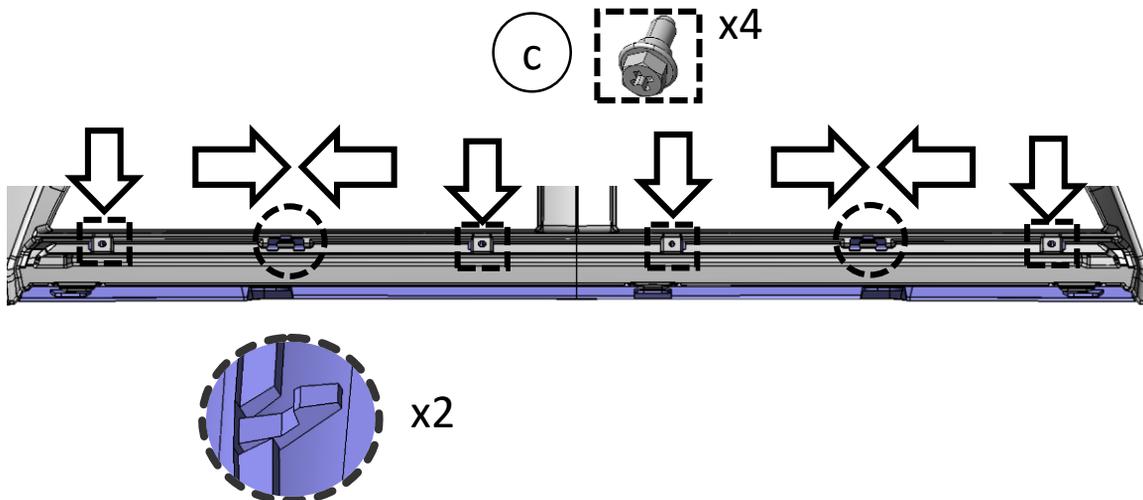

8

(b)  x3

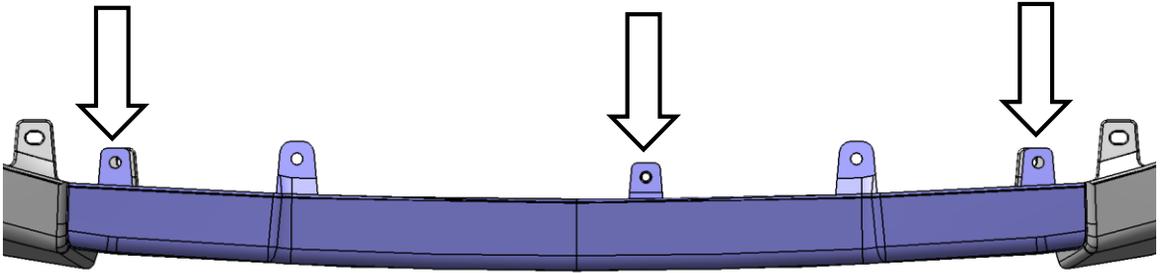

9

Install Front Bumper – See step 2 through 2d