



SUBARU

INSTALLATION INSTRUCTIONS

PART NUMBER: E101SSJ000

DESCRIPTION:


Forester Sill Plate

KIT CONTENTS:


- 1. Front Side Sill Plate (2).
- 2. Front Sill Plate Template (2).
- 3. Squeegee (1).
- 4. Alcohol Wipes (2).



1. Front Side Sill Plate (2)



2. Front Sill Plate Templates



3. Squeegee




4. Alcohol Wipes

TOOLS REQUIRED:



Soft lint-free
Microfiber Cloth



Masking Tape



Scissors

MEANING OF CHARACTERS:



Denotes warnings that may lead to serious physical injury or vehicle damage.



Denotes quality processes to be checked prior to moving to the next step.

Denotes safety equipment required to be used such as a mask, goggles, rubber gloves, and hearing protection.



Denotes cautions to be taken to avoid physical injury or electronic component damage.



Denotes specific tools that are necessary to complete the step.



Mask



Goggles



Denotes cautions to be taken to avoid vehicle and component damage.



Denotes instructional steps necessary to complete the process.



Rubber Gloves



Hearing Protection


PREPARATION - BEFORE INSTALLATION:

1. This product should be installed with proper installation tools.
2. Install this product while observing all warnings and precautions stated in this instruction booklet.
3. **VERY IMPORTANT: Thoroughly wash vehicle with Soap and Water.**
4. Parts storage should be flat at room temperature and in a clean dry place. **Care should be taken to avoid a dusty environment.**


Notes to the Installer

1. Read the entire installation instructions prior to beginning the installation of the accessory.
2. Ensure that the vehicle is properly protected in the area that the accessory is to be installed.
3. To prevent vehicle damage, never place tools on top of painted surfaces, seats, dash pad, console or floor carpet / mat.
4. Always wear appropriate safety gear to include gloves and eye protection when required.

Left Front Door Sill

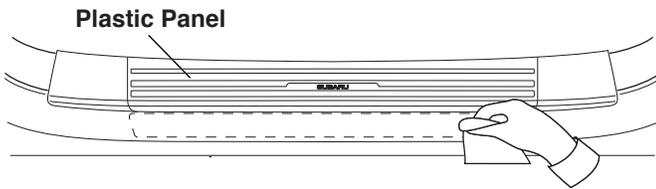

Left Front Door Sill

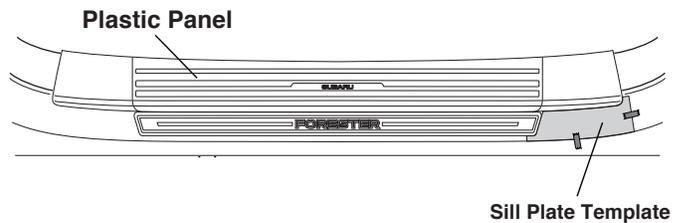

1 Alcohol

Thoroughly wash vehicle with a soft lint-free cloth. Wipe front sill area where the Sill Plate will be installed with alcohol wipes. Allow the area to dry completely.


2 Dry Fit

Cut out supplied templates. Line up edges of the plastic panel with the lines on the template. Use masking tape to secure template into place. Locate front Sill Plate into place using the template as shown above.
NOTE: Sill Plate should remain on flat surface only, not on radius.


Sill Plate

Adhesive side of Sill Plate

Liner



Left Front Door Sill

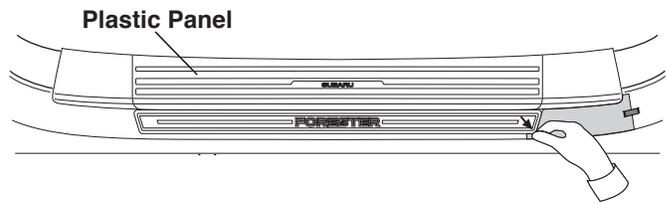


3 Separate Liner

Remove liner from Sill Plate. After removal of part liner, to prevent contamination, limit touching adhesive side of Sill Plate by handling on the edges.

4 Sill Plate Alignment

Start by aligning the edge of Sill Plate with the template as shown. Make sure the top edge of the Sill Plate is aligned with the plastic panel and lay into position.
NOTE: If mislocated, lift straight up and reposition into correct location.

Left Front Door Sill

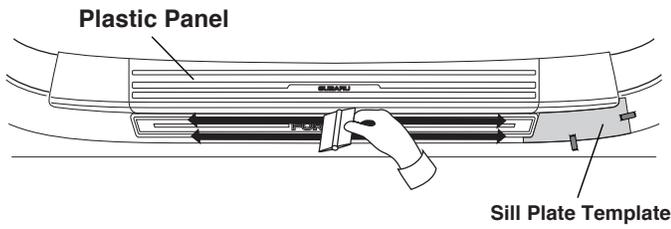

5 Adhere To Surface

 Starting in the center, squeegee the top surface of the Sill Plate onto the surface of sill area as shown, using firm, overlapping squeegee strokes. Carefully remove template.



****(Repeat Steps 1-8 for right side of vehicle.)***

Care and Cleaning

Items to be Checked	Results of the Check
	Wash side sill plates with warm soapy water as needed, (do not use other chemical based cleaners).

Visual Check

Items to be Checked	Results of the Check
	Make sure all edges are firmly adhered.

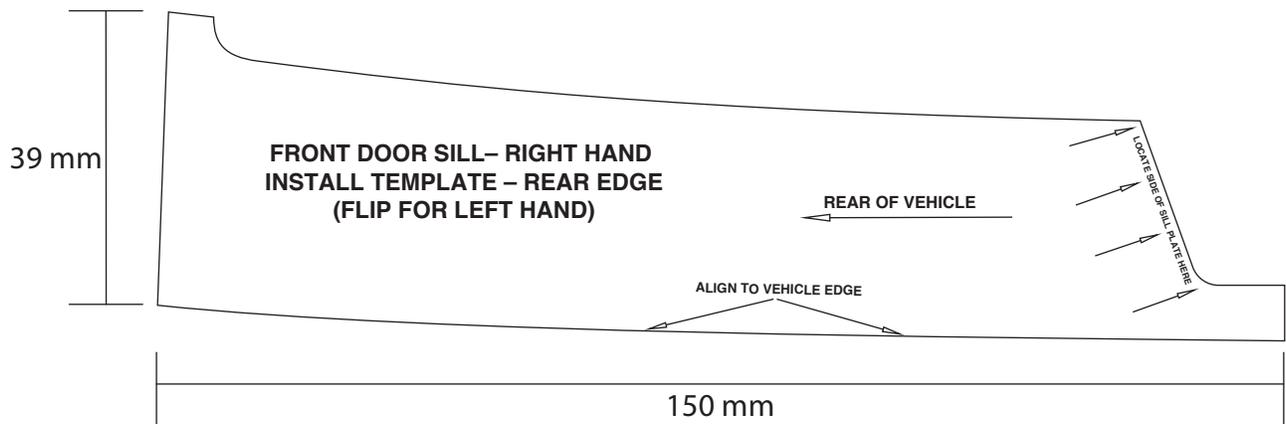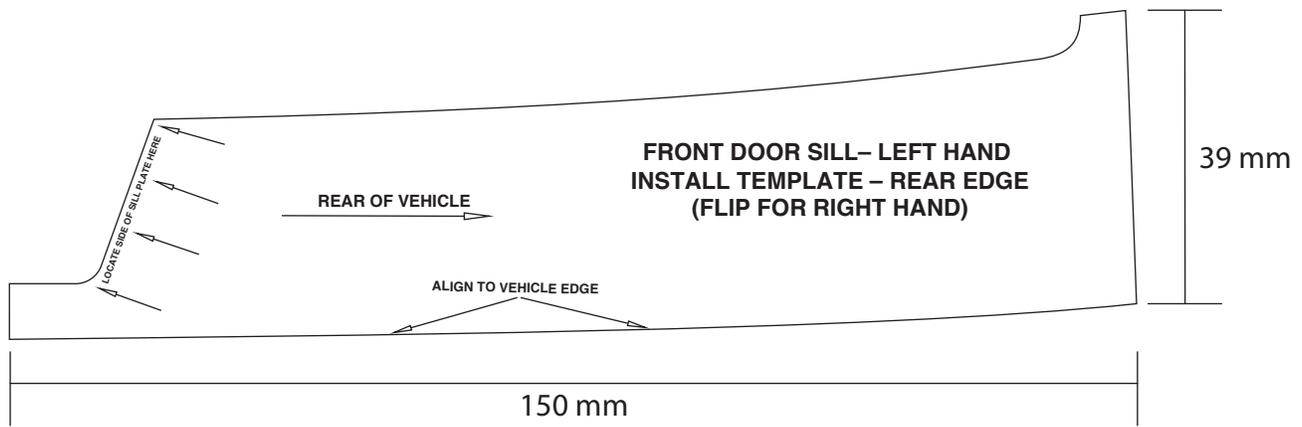

1" x 1"
SQUARE FOR
SCALE
REFERENCE