




INSTALLATION INSTRUCTIONS
INSTRUCTIONS D'INSTALLATION



PART NUMBER: J501SAN222
NUMÉRO DE PIÈCE : J501SAN222

DESCRIPTION: OUTBACK SEAT BACK PROTECTOR
DESCRIPTION: PROTECTEUR DE DOSSIER DE SIÈGE – OUTBACK

A

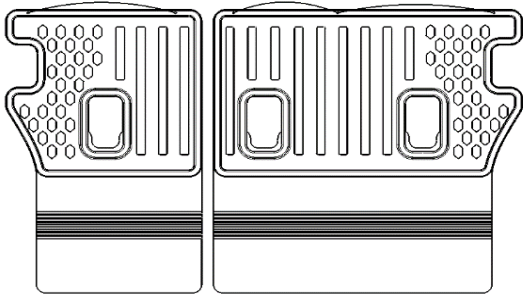


Seat Back Protector




Adapter Pad Kit (Wilderness Edition)
Adapter pad x 3 Alcohol pad x 2

MEANING OF CHARACTERS:
SIGNIFICATION DES SYMBOLES:



:Remove / :Enlever




:Install / :Poser



:Move / :Déplacer

1


Collapse rear seats and remove headrests (See owner's manual for details).

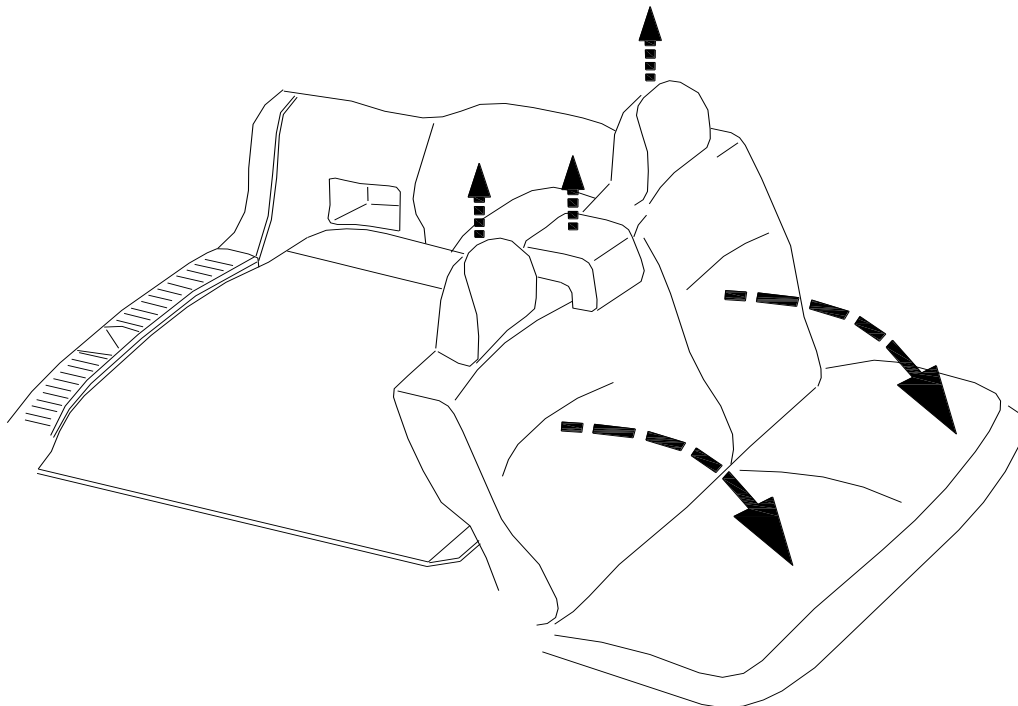

1A


For Wilderness Edition only:

Before installation, use alcohol pad to clean the lower area of the seatback along the bottom seam, below the Child Seat Tether Anchor to ensure proper adhesion. Remove protectors from the back of adapter pads and discard.

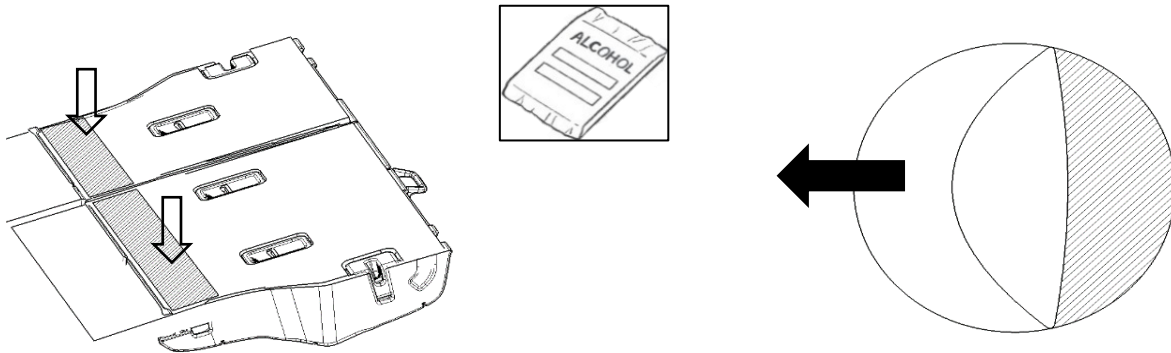


1b

Install the adapter pad along the bottom seatback seam and align with the Child Seat Tether Anchor on both driver's and passenger's sides. Massage the adapter pad to ensure proper adhesion.

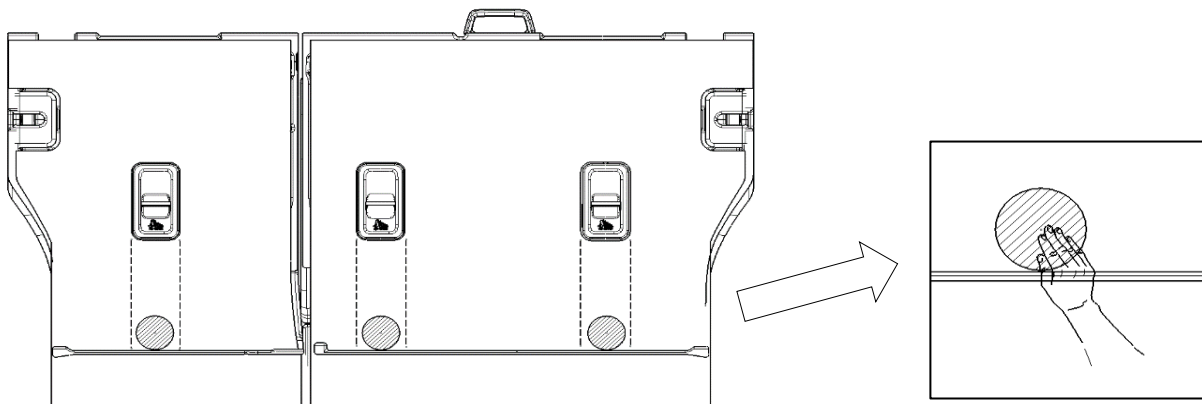


2

Hold top and bottom of tray up (preventing the velcro strips from adhering to the vehicle carpet) while sliding tray into position. Ensure Seat Back Protector cut-out retention flap engages child seat tether hook trim pieces in all three positions. Also, ensure the seatback protectors are even across the top of both sides.

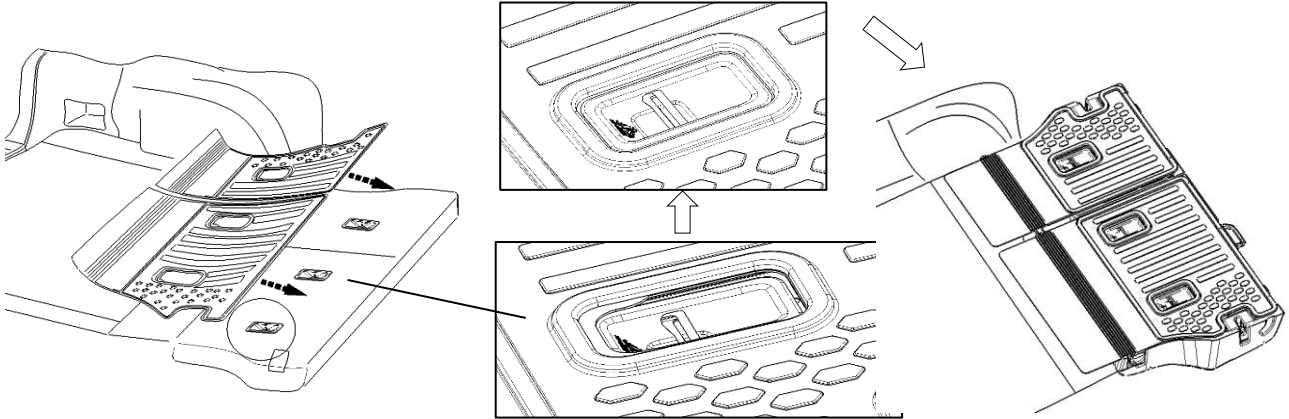


3

Apply pressure around perimeter of seat back protector and child tether cut-outs to ensure adequate connection to vehicle.

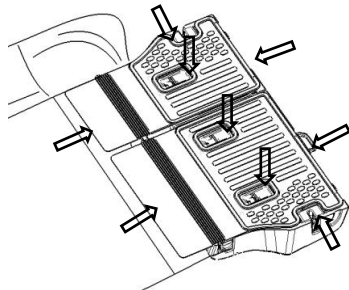

4

Lift seats back to vertical position while pushing down on hinge areas of seatback protector.

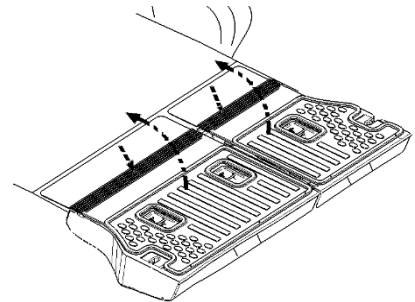

5

Re-install headrests, with bungees installed under the headrest post bezels to prevent rubbing on the headrest posts.

